


CTDB-6351IR


W-5 True Day/Night Camera

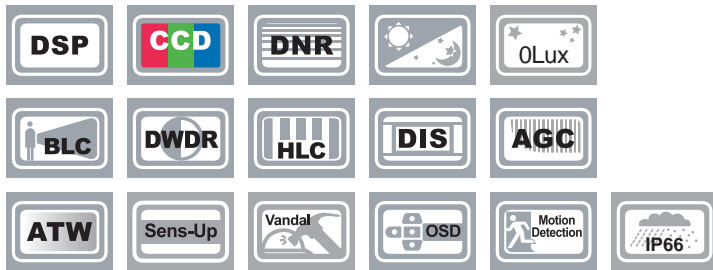

[Features]

- SONY 1/3" Super HADII High Sensitivity Color CCD (Enhanced CCD)
- High Resolution : 600TVL (Color), 700TVL (B/W)
- Min. Illumination : 0 Lux with IR-LED (30pcs)
- Sens-Up (2x~512x)
- Vari-Focal Auto Iris Lens (2.8~10mm/F1.2, 3.8~9.5mm/F1.2)
- True Day & Night for clear image 24 hours
- Next Generation DNR(2D + 3D) for saving storage
- Digital WDR (Wide Dynamic Range)
- HLC (High Light Compensation)
- Private Masking (12 zones)
- Motion Detection (8 zones)
- Multi-languages OSD
- DIS (Digital Image Stabilizer)
- OSD Remote Control via RS-485
- Built-in IR-LED (30pcs) & Photo Sensor
- Viewable Distance at Night : 25m
- Flexible backlight compensation zone setting
- Digital Zoom (16x)
- Coaxial Control : Pelco Coaxitron
- Weatherproof (IP66)

[Dimensions]

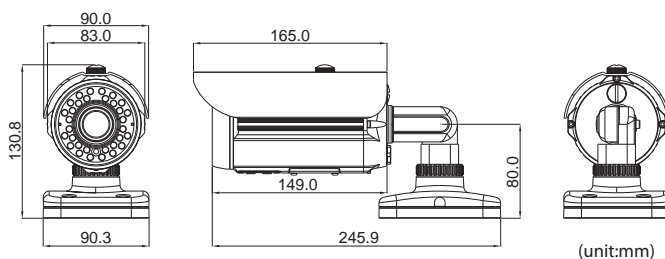

[Specifications]

ITEM	NTSC	PAL
Power Consumption	12VDC Only (Max.500mA) 24VAC/12VDC (Max.450mA/750mA)	
Image Sensor	SONY 1/3" Super HADII High Sensitivity Color CCD	
Total Pixels	811(H) x 508(V)	795(H) x 596(V)
Effective Pixels	768(H) x 494(V)	752(H) x 582(V)
Scanning System	2:1 Interlace	
Synchronization	INT / LL	
Frequency	Horizontal:15.734KHz,Vertical:5994Hz	Horizontal:15.625KHz,Vertical:50.00Hz
H.Resolution	600 TV lines (Color), 700 TV lines (B/W)	
S/N	52dB (AGC Off, Weight ON)	
Min. Illumination	0Lux with IR-LED (30pcs)	
White Balance	ATW / AWC / MANUAL(1700°K ~11,000°K)	
Shutter Speed	1/60,1/50 ~ 1/120,000 sec	
Sens-up	AUTO / OFF (Selectable x2 ~ x512)	
Gain Control	LOW / HIGH / OFF	
DNR	ON / OFF (1~32 Level)	
Motion Detection	ON / OFF (8 Zone, ALARM Output)	
Privacy Function	ON / OFF (12 Zones)	
V-REV	ON / OFF	
H-REV	ON / OFF	
Freeze	ON / OFF	
Sharpness	ON/OFF (Level Adjustable)	
DIS	ON / OFF	
Digital Zoom	ON / OFF (x16)	
Operating temperature/Humidity	-10°C to + 50°C / 30% to 80% RH	
Storing Temperature/Humidity	-20°C to + 60°C / 20% to 90% RH	
Weight	1,100g	